


Quick Start

1. Wiring connection

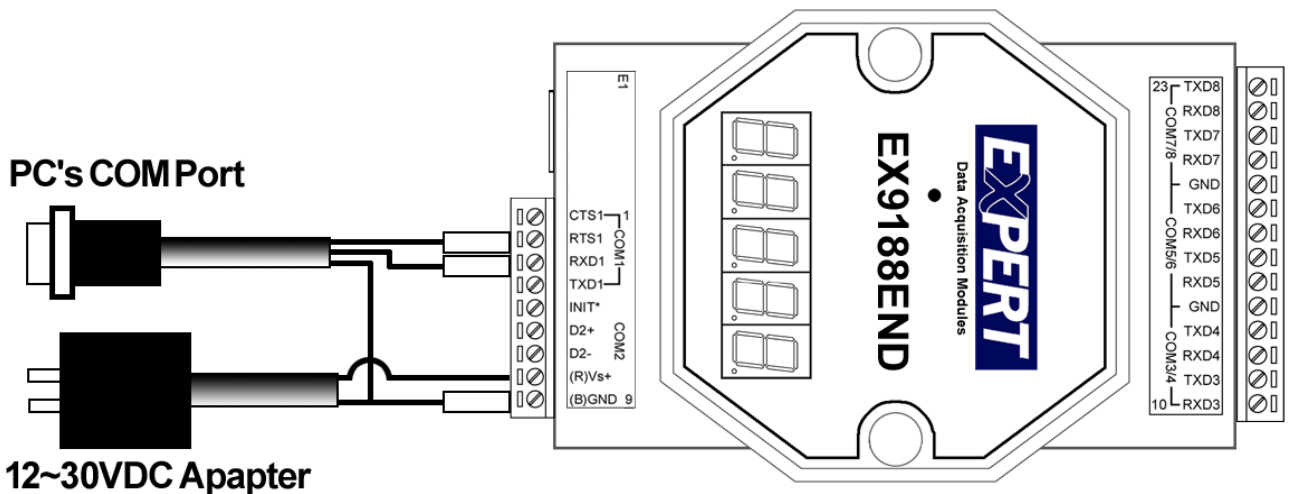

2. Connect COM1 of Ex9188A8D to com1(2) of PC.
3. Under Hyperterminal of PC (**Com port setting: 57600,8.N.1**)
4. Power On Ex9188A8D
5. HyperTerminal of PC will show the boot message of EX9188A8D and DOS prompt (a:\>)
6. DOS command can be executed at command prompt as dir a:\; dir b: .
7. For file transfer or downloading file, please refer to Ex9188xd manual P.22.
8. For updating the contents of ROM DISK, please refer to Ex9188xd manual P.23&P.24(ROMDISK.EXE & TOROM.EXE).
9. Please refer to the Ex9188xd S/W manual to get others function & operation as RAMDISK, VDISK

***** **9188X8D Infomation Setting Utility** *****

M : Modify Model No 9188A8

B : Modify Baudrate 1:57600 2:9600 3:9600 4:9600
5:9600 6:9600 7:9600 8:9600

D : Modify Databit 1:8 2:8 3:8 4:8 5:8 6:8 7:8 8:8

P : Modify Parity 1:0 2:0 3:0 4:0 5:0 6:0 7:0 8:0

S : Modify Stopbit 1:1 2:1 3:1 4:1 5:1 6:1 7:1 8:1

F : Factory Default

Q : quit

***** **Press Keyword** *****

Default COM port configuration:				
	Baudrate	Dtatbit	Parity	Stopbit
COM1	57600	8	N(none)	1
COM2	9600	8	N(none)	1
COM3	9600	8	N(none)	1
COM4	57600	8	N(none)	1
COM5	9600	8	N(none)	1
COM6	9600	8	N(none)	1
COM7	9600	8	N(none)	1
COM8	9600	8	N(none)	1